

CWP-197
ACTI, 4731U0015-2F
February 1996



Amplitude Preservation for Offset Continuation: Confirmation for Kirchhoff Data

Sergey Fomel and Norman Bleistein¹

This is an interim report for ACTI Subcontract, No. 4731U0015-2F, submitted to Los Alamos National Laboratory and industry project partners, February, 1996. This research is also partially supported by the Center for Wave Phenomena Consortium Project at the Colorado School of Mines and the Stanford Exploration Project at Stanford University.

Center for Wave Phenomena
Colorado School of Mines
Golden, Colorado 80401
303-273-3557

¹e-mail: sergey@sep.stanford.edu, norm@dix.mines.edu

ABSTRACT

Offset continuation (OC) is the operator that transforms common-offset seismic reflection data from one offset to another. In earlier papers by the first author, a partial differential equation in midpoint and offset was presented to achieve this transformation. The equation was derived from the kinematics of the continuation process. This is equivalent to proposing the wave equation from knowledge of the eikonal equation. While such a method will produce a PDE with the same traveltimes, it does not guarantee that the amplitude will be correctly propagated by the resulting second order partial differential equation. The second author (with J. K. Cohen) proposed a DMO operator for which a verification of amplitude preservation was proven for Kirchhoff data in the two-and-one-half dimensional case. It was observed by the first author that the solution of the OC partial differential equation produced the same DMO solution when specialized to continue data to zero offset. In a synthesis of these two approaches, we present here a proof that the solution of the OC partial differential equation does propagate amplitude properly at all offsets, at least to the same order of accuracy. That is, it provides a solution with the correct traveltime and correct leading order amplitude. “Correct amplitude” in this case means that the transformed amplitude exhibits the right geometrical spreading and reflection-surface-curvature effects for the new offset. The reflection coefficient of the original offset is preserved in this transformation. This result is more general than the earlier results in that it does not rely on the two-and-one-half dimensional assumption.

INTRODUCTION

Offset continuation (OC) is the operator that transforms common-offset seismic reflection data from one offset to another. Following the classic results of Derogowski and Rocca (1981), Bolondi et al. (1982; 1984) described OC as a continuous process of the gradual change of the offset by means of a partial differential equation. Being based on the small-offset small-dip approximation, Bolondi’s equation failed at large offsets or steep reflector dips. Nevertheless, the OC concept inspired a whole flow of research on dip moveout (DMO) correction (Hale, 1991). Since one can view DMO as a particular case of OC (continuation to zero offset), the offset continuation theory can serve as a natural basis for the DMO theory. Its immediate application is in interpolating data undersampled in the offset dimension.

Fomel (1994),(1995a) recently introduced a revised version of the OC differential equation and proved that it provides the correct kinematics of the continued wavefield for any offset and reflector dip under the assumption of constant effective propagation speed. Studying the laws of amplitude transformation shows that in 2.5-D media the amplitudes of the continued seismic gathers transform according to the rules of geometric seismics, except for the reflection coefficient, which remains unchanged (Fomel, 1995a; Goldin & Fomel, 1995). The solution of the boundary

problem on the OC equation for the DMO case (Fomel, 1995b) coincides in the high-frequency asymptotics limit with the amplitude-preserving DMO, also known as Born DMO (Liner, 1991; Bleistein, 1990). However, for the purposes of verifying that the amplitude is correct for any offset, this derivation is incomplete.

In this paper, we perform a direct test on the amplitude properties of the OC equation. We describe the input common-offset data by the Kirchhoff modeling integral, which represents the high-frequency approximation of a reflected (scattered) wavefield, recorded at the surface at non-zero offset (Bleistein, 1984). For reflected waves, the Kirchhoff approximation is accurate up to two orders in the high-frequency series (the ray series) for the differential operator applied to the solution, with the first order describing the phase function alone, and the second order describing the amplitude. We prove that both orders of accuracy are satisfied when the offset continuation equation is applied to Kirchhoff data. Thus, this differential equation is the “right” equation to two orders, producing the correct amplitude as well as the correct phase for offset continuation. That is, the geometical spreading effects and curvature effects on the reflected data are properly transformed. The angularly dependent reflection coefficient of the original offset is preserved.

This proof relates the OC equation with “wave-equation” processing. It also provides additional confirmation of the fact that the true-amplitude OC and DMO operators do not depend on the reflector curvature and can properly handle reflections from arbitrarily shaped reflectors (Bleistein & Cohen, 1995). The latter result was specifically a 2.5D result, whereas the result here does not depend on the 2.5D assumption. That is, the result presented here remains valid when the reflector has out-of-plane variation.

Our method of proof is indirect. We first write the Kirchhoff representation for the reflected wave in a form that can be easily matched to the solution of the OC differential equation. We then present the analogs of the eikonal and transport equations for the OC equation and show that the amplitude and phase of the Kirchhoff representation satisfy those two equations.

THE KIRCHHOFF MODELING APPROXIMATION

We introduce here the Kirchhoff approximate integral representation of the upward propagating response to a single reflector, with separated source and receiver point. We then show how the amplitude of this integrand is related to the zero-offset amplitude at the source receiver point on the ray making equal angles at the scattering point with the rays from the separated source and receiver. The Kirchhoff integral representation (Haddon & Buchen, 1981; Bleistein, 1984) describes the wavefield scattered from a single reflector. It is applicable in the situations where the high-frequency assumption is valid (the wavelength is smaller than the characteristic dimensions of the model) and corresponds in accuracy to the WKBJ approximation for reflected waves, including phase shifts through buried foci. The general form of

the Kirchhoff modeling integral is

$$U_S(\mathbf{r}, \mathbf{s}, \omega) = \int_{\Sigma} R(\mathbf{x}; \mathbf{r}, \mathbf{s}) \frac{\partial}{\partial n} [U_I(\mathbf{s}, \mathbf{x}, \omega) G(\mathbf{x}, \mathbf{r}, \omega)] d\Sigma, \quad (1)$$

where $\mathbf{s} = (s, 0, 0)$ and $\mathbf{r} = (r, 0, 0)$ stand for the source and the receiver location vectors at the surface of observation, \mathbf{x} denotes a point on the reflector surface Σ ; R is the reflection coefficient at Σ ; n is the upward normal to the reflector at the point \mathbf{x} ; U_I and G are the incident wavefield and Green's function, respectively, represented by their WKBJ approximation,

$$U_I(\mathbf{s}, \mathbf{x}, \omega) = F(\omega) A_s(\mathbf{s}, \mathbf{x}) e^{i\omega \tau_s(\mathbf{s}, \mathbf{x})}, \quad (2)$$

$$G(\mathbf{x}, \mathbf{r}, \omega) = A_r(\mathbf{x}, \mathbf{r}) e^{i\omega \tau_r(\mathbf{x}, \mathbf{r})}. \quad (3)$$

In this equation, $\tau_s(\mathbf{s}, \mathbf{x})$ and $A_s(\mathbf{s}, \mathbf{x})$ are the traveltimes and the amplitude of the wave propagating from \mathbf{s} to \mathbf{x} , $\tau_r(\mathbf{x}, \mathbf{r})$ and $A_r(\mathbf{x}, \mathbf{r})$ are the corresponding quantities for the wave propagating from \mathbf{x} to \mathbf{r} , and $F(\omega)$ is the spectrum of the input signal, assumed to be the transform of a bandlimited impulsive source. In the time domain, the Kirchhoff modeling integral transforms to

$$u_S(\mathbf{r}, \mathbf{s}, t) = \int_{\Sigma} R(\mathbf{x}; \mathbf{r}, \mathbf{s}) \frac{\partial}{\partial n} [A_s(\mathbf{s}, \mathbf{x}) A_r(\mathbf{x}, \mathbf{r}) f(t - \tau_s(\mathbf{s}, \mathbf{x}) - \tau_r(\mathbf{x}, \mathbf{r}))] d\mathbf{x}. \quad (4)$$

with f the inverse temporal transform of F . The reflection traveltimes τ_{sr} corresponds physically to the diffraction from a point diffractor, located at the point \mathbf{x} on the surface Σ and the amplitudes, A_s and A_r are point diffractor amplitudes, as well.

The main goal of this paper is to test the compliance of the representation (4) with the offset continuation differential equation. The OC equation contains the derivatives of the wavefield with respect to the parameters of observation (\mathbf{s}, \mathbf{r} , and t). According to the rules of classic calculus, these derivatives can be taken under the integrational sign in (4). Furthermore, since we do not assume the true-amplitude OC operator to affect the reflection coefficient R , we can take the offset-dependence of this coefficient outside of the scope of consideration. Therefore, the only term to be considered as a trial solution to the OC equation is the kernel of the Kirchhoff integral, which is contained in the square brackets in (1) and (4) and has the form

$$k(\mathbf{s}, \mathbf{r}, \mathbf{x}, t) = A_{sr}(\mathbf{s}, \mathbf{r}, \mathbf{x}) f(t - \tau_{sr}(\mathbf{s}, \mathbf{r}, \mathbf{x})), \quad (5)$$

where

$$\tau_{sr}(\mathbf{s}, \mathbf{r}, \mathbf{x}) = \tau_s(\mathbf{s}, \mathbf{x}) + \tau_r(\mathbf{x}, \mathbf{r}). \quad (6)$$

$$A_{sr}(\mathbf{s}, \mathbf{r}, \mathbf{x}) = A_s(\mathbf{s}, \mathbf{x}) A_r(\mathbf{x}, \mathbf{r}), \quad (7)$$

In a 3-D medium with a constant velocity v , the traveltimes and the amplitudes have the simple explicit expressions:

$$\tau_s(\mathbf{s}, \mathbf{x}) = \frac{\rho_s(\mathbf{s}, \mathbf{x})}{v}, \quad \tau_r(\mathbf{x}, \mathbf{r}) = \frac{\rho_r(\mathbf{x}, \mathbf{r})}{v}, \quad (8)$$

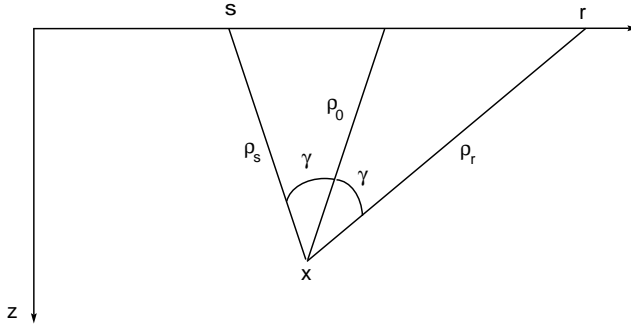


FIG. 1. Geometry of diffraction in a constant velocity medium: View in the reflection plane.

$$A_s(\mathbf{s}, \mathbf{x}) = \frac{1}{4\pi \rho_s(\mathbf{s}, \mathbf{x})}, \quad A_r(\mathbf{s}, \mathbf{x}) = \frac{1}{4\pi \rho_r(\mathbf{x}, \mathbf{r})}, \quad (9)$$

where ρ_s and ρ_r are the lengths of the incident and reflected rays, respectively (Figure 1).

We introduce a particular zero-offset amplitude, namely the amplitude along the zero offset ray that bisects the angle between the incident and reflected ray in this plane. See Figure 1. We denote the square of this amplitude by A_0 . That is,

$$A_0 = \frac{1}{(4\pi \rho_0)^2}. \quad (10)$$

As follows from formulas (7) and (9), the amplitude transformation in DMO (continuation to zero offset) is characterized by the dimensionless ratio

$$\frac{A_{sr}}{A_0} = \frac{\rho_0^2}{\rho_s \rho_r}, \quad (11)$$

where ρ_0 is the length of the zero-offset ray (Figure 1).

As follows from the simple trigonometry of the triangles, formed by the incident and reflected rays (the law of cosines),

$$\begin{aligned} & \sqrt{\rho_s^2 + \rho_0^2 - 2 \rho_s \rho_0 \cos \gamma} + \sqrt{\rho_r^2 + \rho_0^2 - 2 \rho_r \rho_0 \cos \gamma} \\ &= \sqrt{\rho_s^2 + \rho_r^2 - 2 \rho_s \rho_r \cos 2\gamma}, \end{aligned}$$

where γ is the reflection angle as shown in the figure. After straightforward algebraic transformations of equation (12), we arrive to the explicit relationship between the ray lengths:

$$\frac{(\rho_s + \rho_r) \rho_0}{2 \rho_s \rho_r} = \cos \gamma. \quad (12)$$

Substituting (12) to (11) yields

$$\frac{A_{sr}}{A_0} = \frac{\tau_0}{\tau_{sr}} \cos \gamma , \quad (13)$$

where τ_0 is the zero-offset twoway traveltime ($\tau_0 = 2 \rho_0/v$).

What we have done here is rewrite the finite offset amplitude in the Kirchhoff integral in terms of a particular zero offset amplitude. That zero offset amplitude would arise as the geometrical spreading effect if there were a reflector whose dip was such that the finite offset pair would be specular at this scattering point. Of course, the zero offset ray would also be specular in this case.

THE OFFSET CONTINUATION EQUATION

In this section we introduce the offset continuation partial differential equation. We then develop its WKBJ or ray theoretic solution for phase and leading order amplitude. We explain how we verify that the traveltime and amplitude of the integrand of the Kirchhoff representation (4) satisfy the “eikonal” and ”transport” equations of the OC partial differential equation. Here, we will make use of the relationship (13) derived from the Kirchhoff integral.

The offset continuation differential equation derived in earlier papers (Fomel, 1994; Fomel, 1995a) is

$$h \left(\frac{\partial^2 P}{\partial y^2} - \frac{\partial^2 P}{\partial h^2} \right) = t_n \frac{\partial^2 P}{\partial t_n \partial h} . \quad (14)$$

In this equation, h is the half-offset ($h = l/2$), y is the midpoint ($\mathbf{y} = (\mathbf{s} + \mathbf{r})/2$) [and, hence, $y = (r + s)/2$] and t_n is the NMO-corrected traveltime:

$$t_n = \sqrt{t^2 - \frac{l^2}{v^2}} , \quad (15)$$

Equation (14) describes the process of seismogram transformation in the time-midpoint-offset domain. One can obtain the high-frequency asymptotics of its solution by standard methods, as follows. We introduce a trial asymptotic solution of the form

$$P(y, h, t_n) = A_n(y, h) f(t_n - \tau_n(y, h)) . \quad (16)$$

We remind the reader that we have assumed that f is a “rapidly varying function”—think of a bandlimited delta function, for example. We substitute this solution into equation (14) and collect terms in order of derivatives of f . This is the direct counterpart of collecting terms in powers of frequency when applying WKBJ in the frequency domain. From the leading asymptotic order (the second derivative of the function f), we obtain the “eikonal” equation describing the kinematics of the OC transformation:

$$h \left[\left(\frac{\partial \tau_n}{\partial y} \right)^2 - \left(\frac{\partial \tau_n}{\partial h} \right)^2 \right] = -\tau_n \frac{\partial \tau_n}{\partial h} . \quad (17)$$

In this equation, we have replaced a multiplier of t_n by τ_n on the right side of the equation. This is consistent with our assumption that f is a bandlimited delta function or some equivalent impulsive source. Analogously, collecting the terms containing the first derivative of f leads to the “transport” equation describing the transformation of the amplitudes:

$$\left(\tau_n - 2h \frac{\partial \tau_n}{\partial h} \right) \frac{\partial A_n}{\partial h} + 2h \frac{\partial \tau_n}{\partial y} \frac{\partial A_n}{\partial y} + h A_n \left(\frac{\partial^2 \tau_n}{\partial y^2} - \frac{\partial^2 \tau_n}{\partial h^2} \right) = 0. \quad (18)$$

Rewriting the eikonal equation (17) in the time-source-receiver coordinate system:

$$\left(\tau_{sr}^2 + \frac{l^2}{v^2} \right) \left(\frac{\partial \tau_{sr}}{\partial r} - \frac{\partial \tau_{sr}}{\partial s} \right) = 2l \tau_{sr} \left(\frac{1}{v^2} - \frac{\partial \tau_{sr}}{\partial r} \frac{\partial \tau_{sr}}{\partial s} \right), \quad (19)$$

it is easy (for Mathematica) to verify that the explicit expression for the phase of the Kirchoff integral kernel (6) satisfies it for any scattering point² $\mathbf{x} = (x_1, x_2, z)$. Here, τ_{sr} is related to τ_n as t is related to t_n in (15).

The general solution of the amplitude equation (18) has the form (Fomel, 1995a)

$$A_n = A_0 \frac{\tau_0 \cos \gamma}{\tau_n} \left(\frac{1 + \rho_0 K}{\cos^2 \gamma + \rho_0 K} \right)^{1/2}, \quad (20)$$

where K is the reflector curvature at the reflection point. Since the kernel (5) of the Kirchoff integral (4) corresponds kinematically to the reflection from a point diffractor, we can obtain the solution of the amplitude equation for this case by formally setting the curvature K to infinity (setting the radius of curvature to zero). This leads to the relationship

$$\frac{A_n}{A_0} = \frac{\tau_0}{\tau_n} \cos \gamma. \quad (21)$$

Again, we exploit the assumption that the signal f has the form of the delta-function. In this case, the amplitudes before and after the NMO correction are connected according to the known properties of the delta function, as follows:

$$A_{sr} \delta(t - \tau_{sr}(\mathbf{s}, \mathbf{r}, \mathbf{x})) = \left. \frac{\partial t_n}{\partial t} \right|_{t=\tau_{sr}} A_{sr} \delta(t_n - \tau_n(\mathbf{s}, \mathbf{r}, \mathbf{x})) = A_n \delta(t_n - \tau_n(\mathbf{s}, \mathbf{r}, \mathbf{x})), \quad (22)$$

with

$$A_n = \frac{\tau_{sr}}{\tau_n} A_{sr}. \quad (23)$$

²Note that the scattering point \mathbf{x} plays the role of a set of parameters in the partial differential equation for τ_{sr} . To pass from a two dimensional in-plane travelttime to a three dimensional travelttime, one need only replace z^2 by $x_2^2 + z^2$, with the role of $x = x_1$ remaining unchanged in the solution.

Combining (23) with (21) leads to the equation

$$\frac{A_{sr}}{A_0} = \frac{\tau_0}{\tau_{sr}} \cos \gamma , \quad (24)$$

exactly coincident with the previously found formula (13). As with the solution of the eikonal equation, we pass from an in-plane solution in two dimensions to a solution for a scattering point in three dimensions by replacing z^2 by $x_2^2 + z^2$.

Now, with the amplitude and phase of the ray theoretic solution of the OC differential equation (14) matching the amplitude and phase of the Kirchhoff representation, they are seen to be the same. Thus, the amplitude and phase of the Kirchhoff representation for arbitrary offset is seen to be the point diffractor WKBJ solution of the offset continuation differential equation. Hence, the Kirchhoff approximation is a solution of the OC differential equation when we hold the reflection coefficient constant. This means that the solution of the OC differential equation has all of the features of amplitude preservation as does the Kirchhoff representation, including geometrical spreading, curvature effects and phase shift effects. Furthermore, in the Kirchhoff representation and the solution of the OC partial differential equation by WKBJ, we have not used the 2.5D assumption. Hence the preservation of amplitude is not restricted to cylindrical surfaces as was the true amplitude proof for DMO in (Bleistein & Cohen, 1995). This is what we sought to confirm.

DISCUSSION

We have proved that the offset continuation equation correctly transforms common-offset seismic data modeled by the Kirchhoff integral approximation. The kinematic and dynamic equivalence of the OC equation has been proved previously by different methods (Fomel, 1995a; Fomel, 1995b). However, connecting this equation with Kirchhoff modeling opens new insights into the theoretical basis of DMO and offset continuation:

1. The Kirchhoff integral can serve as a link between the wave-equation theory, conventionally used in seismic data processing and the kinematically derived OC equation. Though the analysis in this paper follows the constant-velocity model, this link can be extended in principle to handle the case of a variable background velocity.
2. The OC equation operates on the kernel of the Kirchhoff integral, which is independent on the local dip and the curvature of the reflector. This proves that the true-amplitude OC and DMO operators can properly handle curved reflectors. Moreover, this result does not imply any special orientation of the reflector curvature matrix. Therefore, it does not require a commonly made 2.5-D assumption (Bleistein & Cohen, 1995; Fomel, 1995a). Implicitly, this proves the amplitude preservation property of the three-dimensional azimuth moveout

(AMO) operator (Biondi & Chemingui, 1994; Fomel & Biondi, 1995), based on cascading the true-amplitude DMO and inverse DMO operators.

ACKNOWLEDGMENTS

The authors thank the Center for Wave Phenomena Consortium Project at the Colorado School of Mines and the Stanford Exploration Project at Stanford University. The first author also gratefully acknowledges the support and encouragement of Fabio Rocca on the analysis of the offset continuation partial differential equation.

References

- Biondi, B., & Chemingui, N. 1994. Transformation of 3-D prestack data by azimuth moveout (AMO). *Pages 1541–1544 of: 64th Annual Internat. Mtg., Soc. Expl. Geophys., Expanded Abstracts*. Los Angeles: Soc. Expl. Geophys.
- Bleistein, N. 1984. *Mathematical Methods for wave Phenomena*. New York: Academic Press Inc. (Harcourt Brace Jovanovich Publishers).
- Bleistein, N. 1990. Born DMO Revisited. *Pages 1366–1369 of: 60th Annual Internat. Mtg., Soc. Expl. Geophys., Expanded Abstracts*. Tulsa: Soc. Expl. Geophys.
- Bleistein, N., & Cohen, J. K. 1995. *The effect of curvature on true amplitude DMO: Proof of concept*. Tech. rept. ACTI, 4731U0015-2F; CWP-193, Colorado School of Mines.
- Bolondi, G., Loinger, E., & Rocca, F. 1982. Offset Continuation of Seismic Sections. *Geophys. Prosp.*, **30**(6), 813–828.
- Bolondi, G., Loinger, E., & Rocca, F. 1984. Offset Continuation in Theory and Practice. *Geophys. Prosp.*, **32**(6), 1045–1073.
- Deregowski, S. M., & Rocca, F. 1981. Geometrical Optics and Wave Theory of Constant Offset Sections in Layer ed Media. *Geophys. Prosp.*, **29**(3), 374–406.
- Fomel, S. 1995a. *Amplitude preserving offset continuation in theory, Part 1 : The offs et continuation equation*. Report. SEP.
- Fomel, S. 1995b. *Amplitude Preserving offset continuation in theory, Part 2: Solving the equation*. Report. SEP.
- Fomel, S., & Biondi, B. 1995. The time and space formulation of azimuth moveout. *Pages 1449–1452 of: 65th Annual Internat. Mtg., Soc. Expl. Geophys., Expanded Abstracts*. Houston: Soc. Expl. Geophys.

- Fomel, S. B. 1994. Kinematically equivalent differential operator for offset continuation of reflected wave seismograms. *Russian Geology and Geophysics*, **35**(9), 122–134.
- Goldin, S. V., & Fomel, S. B. 1995. Estimation of Reflection Coefficient in DMO. *Russian Geology and Geophysics*, **36**(4), 103–115.
- Haddon, R. A. W., & Buchen, P. W. 1981. Use of Kirchhoff's formula for body wave calculations in the earth. *Geophys. J. Roy. Astr. Soc.*, **67**, 587–598.
- Hale, D. 1991. *Course notes: Dip moveout processing*. Tulsa: Soc. Expl. Geophys. 130 pp.
- Liner, C. L. 1991. Born Theory of Wave-Equation Dip Moveout. *Geophysics*, **56**(2), 182–189.